



# Acoem AT-200

Enhanced measurement and reporting capabilities with the Acoem AT-200 laser shaft alignment tool The Acoem AT-200, a pinnacle in shaft alignment perfection meticulously crafted over four decades of unparalleled expertise and groundbreaking innovation. Elevating your user experience with cutting-edge technology, this solution embodies the epitome of precision and efficiency.

Experience the future of precision alignment with Acoem's AT-200. This app-based shaft alignment tool blends integrated apps, patented tech, and effortless connectivity for unparalleled performance in Industry 4.0. Elevate your precision game with the AT-200 – where innovation meets efficiency.







## A complete shaft alignment solution

• Two smart wireless sensors with their accessories

 Task oriented Horizontal & Vertical shaft alignment mobile apps

 Optional Acoem Cloud connectivity with report storage, trending and work order and sharing capabilities with secure communication.

Digital sensors with 30 mm detector and line laser eliminate rough alignment and shorten setup time

Thin sensors suitable for machines with limited space

Integrated Bluetooth for wireless communication between display unit and smart sensors

IP65-certified sensors design that can withstand harsh environments



#### Measuring methods.



#### Clock™ method

In the Clock method, machinery positions are calculated by taking three points with 180° of rotation.



#### Tripoint™ method

In the Tripoint method, the alignment condition can be calculated by taking three points while rotating the shaft at least 60°. In this method, all points are taken manually.



#### TRIPOINT Express™ method

This method seamlessly incorporates the Tripoint approach, offering the added advantage of fully automated measurements throughout the process.



The high precision of digital laser technology not only saves you time and money on your shaft alignment, but it also removes human error, extends the life of your machinery and enhances operational performance."


#### GuideU™

#### **Intuitive 3D graphical user interface**

GuideU™ is the next generation alignment 3D graphical user interface – our patented, customisable, icon-driven and color-coded display system makes measuring, aligning, documenting and reporting on each job simple.

GuideU<sup>™</sup> delivers precise measurement, 3-D transitions in alignment view and correction values by minimising the risk of human errors, guiding the operator through the process using visual, logical and easy-to-follow steps.

















## **TrueLive**<sup>™</sup>

## Shaft alignment revolutionized


An industry-first technology, it features two smart sensors with laser beams and inclinometers that monitor both shaft positions at the same time.

Even if you move the machine's position out of detector range or interrupt the laser beam, the smart sensors will resume with an updated machine position and always deliver live values. TrueLive functionality helps you save time when aligning your machinery.

#### **VertiZontal™**

#### Reduce alignment time

VertiZontal™ adaptive user interface automatically indicates exactly how much you need to adjust your misaligned machine by adding or removing shims to the machine's feet. This removes the need to remeasure between the vertical and the horizontal phases to correct the horizontal misalignment. This industry-first function saves time and ensures accuracy with every measurement.

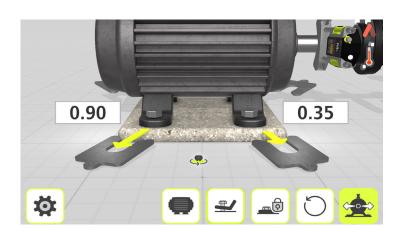




# PDF report

Simplify your reporting process

The Acoem shaft alignment apps' PDF report function provides fast and efficient on-site reporting functionality that converts saved measurement reports into PDF files, that can be shared instantly from your mobile device.

# Alignment intelligence Exceptional measurement accuracy

Acoem AT-200 sensors use superior digital CCD technology, giving you unrivalled digital filtering capabilities and making the sensors highly tolerant of detrimental external factors, such as vibration and ambient light.

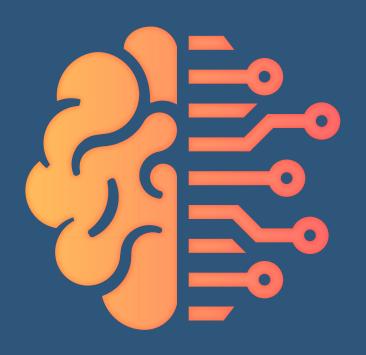

# Accem AT-200 Unleashing the Ultimate Shaft Alignment

#### **Innovation for Precision Maintenance**

Say goodbye to complex maintenance issues! Acoem's AT-200 is here to redefine how you align shafts in industrial machinery. It's part of the Augmented Mechanics Ecosystem, a user-friendly system that combines different technologies for reliable and precise shaft alignment.

Easy to upgrade and adapt, Acoem AT-200 grows with your needs. The system includes mobile apps and wireless sensors, making maintenance a breeze. Experience straightforward and smart shaft alignment with Acoem At-200 – because keeping things simple is the key to getting it right!

Expand your toolkit with additional applications for a more versatile experience within the Ecosystem.







Bearing Defender Pre-Alignment Machine Defender

## Acoem Cloud new environment of possibilities

- Total control over your machinery's proactive & predictive maintenance
- Accessible via any enabled device tablet, smartphone, laptop etc.
- Upgradable, customisable & scalable based on your needs
- Links vibration & alignment data to optimise maintenance process
- Share information instantaneously among your teams
- Benefit of insightful product training videos & Acoem technical support
- Optional Acoem Cloud connectivity with report storage, trending and work order management





## Select Your Package

ACOEM AT-200 D Acoem Alignment Display with Acoem Home included

ACOEM Home is an offline software on ACOEM DU, transferring data via USB

providing secure functions and apps.

ACOEM AT-200 T Tablet Display Our system features a Wi-Fi enabled tablet capable of sharing

reports and receiving app updates seamlessly.

**ACOEM AT-200** Tablet Display unit not included.

#### Technical specification

Dust and water resistance         IP65           Operating temperature         -10°C - 50°C           Measuring distance         Up to 15 meters           Sensor         2nd gen. Scientific grade CCD           Sensor resolution         1µm           Measurement accuracy         ± 0.7µm + 0.3%           Inclinometer         Dual High Performance MEMS           Inclinometer resolution         0,01°           Inclinometer accuracy         ± 0,2°           Measurement accuracy         0,3 % ± 7 µm           Cyroscope         6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration           Gyroscope accuracy         ± 1°           Handheld Algiz RT8 tablet (OPTIONAL)         1           Dust and water resistance         IP67           Operating temperature         -20°C - 60°C, MIL-STD-810G           Orop/Shock         26 drops from 1,2m, MIL-STD-810G           Vibration         MIL-STD-910G           Vibration         MIL-STD-910G           Processor         Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz           RAM and storage         4 GB / 64GB           Operating system         Android 11           Battery         3,8V, 8200 mAh, field replaceable	Sensors M7/S7	
Measuring distance Sensor 2nd gen. Scientific grade CCD Sensor resolution 1µm Measurement accuracy ± 0,7µm + 0,3% Inclinometer Dual High Performance MEMS Inclinometer resolution 0,01° Inclinometer accuracy ±0,2° Measurement accuracy 0,3 % ± 7 µm Gyroscope 6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field callibration  Gyroscope accuracy ±1° Handheld Algiz RT8 tablet (OPTIONAL) Dust and water resistance 1P67 Operating temperature -20°C - 60°C, MIL-STD-810G Drop/Shock 26 drops from 1,2m, MIL-STD-810G Vibration MIL-STD-810G Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz RAM and storage Operating system Android 11	Dust and water resistance	IP65
Sensor 2nd gen. Scientific grade CCD  Sensor resolution 1µm  Measurement accuracy ±0.7µm + 0.3%  Inclinometer Dual High Performance MEMS  Inclinometer resolution 0,01°  Inclinometer accuracy ±0.2°  Measurement accuracy 0,3 % ± 7 µm  Gyroscope cacuracy ±1°  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 46B / 64GB  Operating system Android 11	Operating temperature	-10°C - 50°C
Sensor resolution 1µm  Measurement accuracy ± 0,7µm + 0,3%  Inclinometer Dual High Performance MEMS  Inclinometer resolution 0,01°  Inclinometer accuracy ±0,2°  Measurement accuracy 0,3 % ± 7 µm  Gyroscope 6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy ±1 °  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Measuring distance	Up to 15 meters
Measurement accuracy ± 0.7 µm + 0.3%  Inclinometer Dual High Performance MEMS  Inclinometer resolution 0,01°  Inclinometer accuracy ±0,2°  Measurement accuracy 0,3 % ± 7 µm  Gyroscope 6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy ±1 °  Handheld Algiz RTB tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Sensor	2nd gen. Scientific grade CCD
Inclinometer Dual High Performance MEMS  Inclinometer resolution 0,01°  Inclinometer accuracy ±0,2°  Measurement accuracy 0,3 % ± 7 µm  Gyroscope 6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy ±1°  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Sensor resolution	1µm
Inclinometer resolution  O,01°  Inclinometer accuracy ±0,2°  Measurement accuracy O,3 % ± 7 μm  Gyroscope G-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy ±1°  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage Operating system Android 11	Measurement accuracy	± 0,7µm + 0,3%
Inclinometer accuracy ±0,2°  Measurement accuracy 0,3 % ± 7 µm  Gyroscope 6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy ±1 °  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Inclinometer	Dual High Performance MEMS
Measurement accuracy  Gyroscope  G-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy  ±1°  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance  IP67  Operating temperature  -20°C - 60°C, MIL-STD-810G  Drop/Shock  26 drops from 1,2m, MIL-STD-810G  Vibration  MIL-STD-810G  Display  8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor  Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage  4GB / 64GB  Operating system  Android 11	Inclinometer resolution	0,01°
Gyroscope 6-Axis MEMS Inertial Motion Sensor with drift compensation and automatic field calibration  Gyroscope accuracy ±1 °  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Inclinometer accuracy	±0,2°
calibration  Gyroscope accuracy ±1°  Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Measurement accuracy	0,3 % ± 7 µm
Handheld Algiz RT8 tablet (OPTIONAL)  Dust and water resistance IP67  Operating temperature -20°C - 60°C, MIL-STD-810G  Drop/Shock 26 drops from 1,2m, MIL-STD-810G  Vibration MIL-STD-810G  Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Gyroscope	
Dust and water resistanceIP67Operating temperature-20°C - 60°C, MIL-STD-810GDrop/Shock26 drops from 1,2m, MIL-STD-810GVibrationMIL-STD-810GDisplay8», 1920x1200, Glove/Rain mode, Corning® Gorilla® GlassProcessorQualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHzRAM and storage4GB / 64GBOperating systemAndroid 11	Gyroscope accuracy	±1°
Operating temperature-20°C - 60°C, MIL-STD-810GDrop/Shock26 drops from 1,2m, MIL-STD-810GVibrationMIL-STD-810GDisplay8», 1920x1200, Glove/Rain mode, Corning® Gorilla® GlassProcessorQualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHzRAM and storage4GB / 64GBOperating systemAndroid 11	Handheld Algiz RT8 tablet (OPTIONAL)	
Drop/Shock26 drops from 1,2m, MIL-STD-810GVibrationMIL-STD-810GDisplay8», 1920x1200, Glove/Rain mode, Corning® Gorilla® GlassProcessorQualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHzRAM and storage4GB / 64GBOperating systemAndroid 11	Dust and water resistance	IP67
VibrationMIL-STD-810GDisplay8», 1920x1200, Glove/Rain mode, Corning® Gorilla® GlassProcessorQualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHzRAM and storage4GB / 64GBOperating systemAndroid 11	Operating temperature	-20°C - 60°C, MIL-STD-810G
Display 8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass  Processor Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz  RAM and storage 4GB / 64GB  Operating system Android 11	Drop/Shock	26 drops from 1,2m, MIL-STD-810G
ProcessorQualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHzRAM and storage4GB / 64GBOperating systemAndroid 11	Vibration	MIL-STD-810G
RAM and storage 4GB / 64GB  Operating system Android 11	Display	8», 1920x1200, Glove/Rain mode, Corning® Gorilla® Glass
Operating system Android 11	Processor	Qualcomm® Snapdragon 625 MSM8953, 8 cores 2.0 GHz
	RAM and storage	4GB / 64GB
Battery 3,8V, 8200 mAh, field replaceable	Operating system	Android 11
	Battery	3,8V, 8200 mAh, field replaceable
Camera Rear: 13 Mpixel autofocus and flash, Front: 5 Mpixel	Camera	Rear: 13 Mpixel autofocus and flash, Front: 5 Mpixel



Acoem links possibilities with protection.

For more information visit acoem.com/fixturlaser.com

